

June 9, 2026

MEMORANDUM

Notice – Water Main Replacement Project - Distributed: March 20, 2026

Project:

Installation of a 12” DIP water main to replace an existing 24” PCCP water main in and along Pleasant Hill Road between Mel Drive and Spring Brook Drive and repaving of Pleasant Hill Road from Marre Drive to just east of Park Avenue.

Contractor:

Underground Utilities Corporation (UUC) on behalf of Morris County Municipal Utilities Authority (MCMUA). (Note this work is being performed under a Randolph Township Road Opening Permit for work within the Township Right of Way).

Project Funding:

Private Funding.

June 15, 2026

Anticipated Schedule:

- Estimated Construction Start: On or about April 1, 2026
- Estimated Construction Completion: August 31, 2026
(Schedule subject to change based on unforeseen conditions)

Traffic Impacts:

This construction activity will require full closure of this portion of Pleasant Hill Road with traffic detours posted. All properties within the work area will have limited vehicular access to their driveways during the work activities and property owners are recommended to plan accordingly during this time. The access restrictions are necessary in order to ensure the water main is properly installed and to prevent damage to vehicles using the road during construction. Expect Delays or Plan Alternate Routes.

Construction Activities:

- Excavation and removal of materials to the depth of 48” to 54” in the southerly lane for approximately 1,790 LF.
- Installation of new 12” DIP water main within the trench area.
- Backfill trench with Dense Graded Aggregates compacted to a minimum of 95%.
- Abandon the existing 24” PCCP pipe in place and switch water service to new 12” DIP water main.
- Place HMA asphalt mix (19M64) in various layers to the surface.
- Restripe in areas disturbed by limits of work as needed.
- Various Residential Water Service replacements and stubs for future water connections.
- Milling and repaving of Pleasant Hill Road within construction limits



Roadway View: Typical Water Main Pipe



Roadway View: Typical Backfilling



Roadway View: Typical HMA Pavement to Grade



TOWNSHIP OF RANDOLPH

DIVISION OF ENGINEERING/WATER & SEWER
502 MILLBROOK AVENUE, RANDOLPH, NJ 07856
973-989-7066 / FAX 973-989-5027

June 9, 2026

MEMORANDUM

Notice – Water Main Replacement Project - Distributed: March 20, 2026

Contact Information:

For more information about this project please feel free to contact:


Morris County Municipal Utilities Authority (MCMUA):
Larry Gindoff, Executive Director - 973-285-8390

Contractor: Underground Utilities Corporation (UUC)
Richard Gomes or Jesse Rudy – 908-862-8936

MCMUA Engineer: Suburban Consulting Engineers, Inc (SCE)
Michael McAlloon, PE, Principal - 973-398-1776

Township: Wayne Corsey, PE, CME, Assistant Township Engineer/Water & Sewer Administrator
973-989-7069 or wcorsey@randolphnj.org

Map: Project Limits

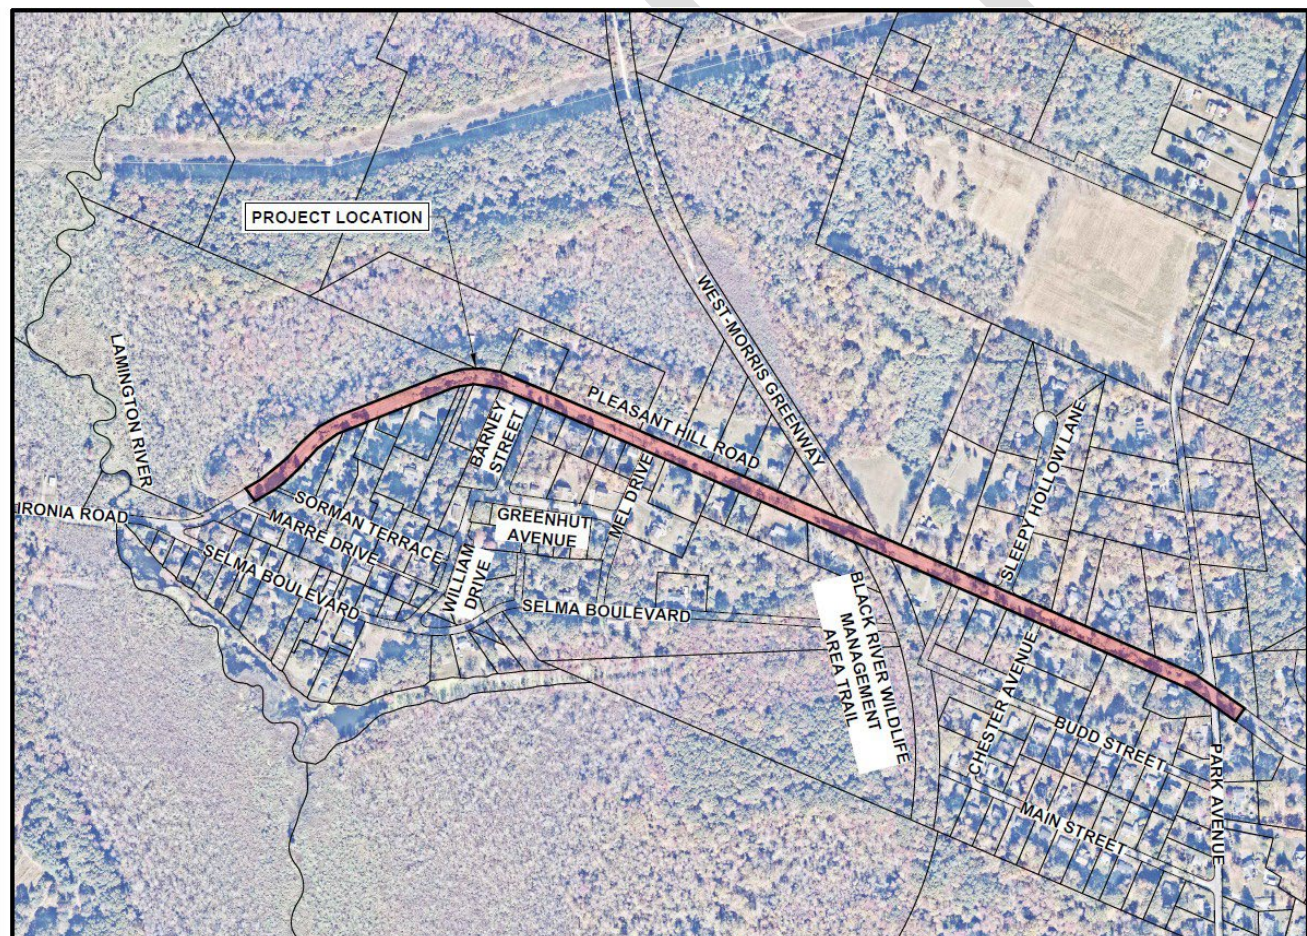

"S:\Engineering\04-Agencies\MCMUA\Pleasant Hill Rd Construction\Phase 2\Documents\Randolph Constr Notice - MCMUA Water - Pleasant Hill - Ph2.docx"